




PRE-FILLED WITH GEL


for integrated connections

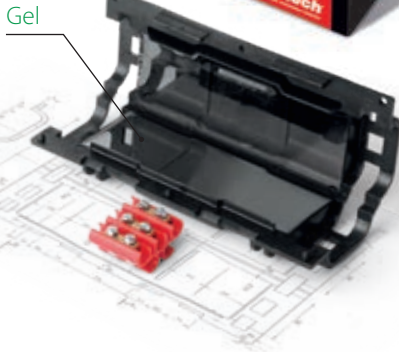


**Electrical performance:** CEI EN 50393  
(with testing under water head  
and water between the cable cores)  
Class 2 in accordance with CEI 64-8.

**No flame propagation:**  
CEI 20-35 • IEC 60332-1 HD405-1  
(as applicable)

Low smoke and toxic and  
corrosive gas emissions

**Gel:** UL 94-HB 

**Case:** UL 94-V2

Operating temperature 

Installation temperature:   
-40°C / +50°C

**IPX8**  
OFFICIALLY  
TESTED 



# Super Klik

Range of fast gel pre-filled straight or branch type joints for 0.6/1 kV multi core cables of up to 5 conductors.

The combination of the primary insulation in a cross-linked polymer gel and the highly robust insulating plastic case makes this a Class 2 joint defined by CEI 64-8. The joint has been tested in accordance with the main international specifications, with repeated flexing and torsion tests and immersion in water, it has been declared as conforming to the mechanical, electrical and sealing specifications required for plastic cable accessories. The joint and its components have an unlimited shelf life, they are chemically inert and therefore completely safe; the connections are re-entrable even after long working periods. Made of self-extinguishing components the joint is flame retardant. For cables at 90°C working temperature.

- Complete with isolated terminal blocks
- For straight and branch connections
- For all types of application, including submersible
- Re-accessible and with no shelf life
- Flame retardant
- Non toxic and safe




# SUPERCLIK



PRE-FILLED WITH GEL  
for integrated connections

## Super Klik Mini

Product	Cable formation and conductor cross sections (n° x mm <sup>2</sup> )				Max cables Ø (mm)	A x B x C (mm)
	Straight Connections In line	Branch connections T B				
Super Klik Mini L	3 x 0,5 - 1,5	-	-		10	71 x 38 x 23
Super Klik Mini Y	-	1 x 2,5 - 6	1 x 2,5		10	71 x 38 x 23




T: Through cable - B: Branch cable

**New**



## Super Klik

Product	Cable formation and conductor cross sections (n° x mm <sup>2</sup> )				Max cables Ø (mm)	A x B x C (mm)
	Straight Connections In line	Branch connections T B				
Super Klik 0	3 x 1,5 - 6	3 x 1,5 - 4	3 x 1,5 - 2,5		14	95 x 43 x 28




T: Through cable - B: Branch cable



Product	In line	T	B	Ø (mm)	(mm)
Super Klik 1	2 x 1,5 - 6	2 x 4	2 x 2,5	20,5	150 x 56 x 30
	3 x 1,5 - 6	3 x 4	3 x 2,5		
	4 x 1,5 - 6	4 x 4	4 x 2,5		
	5 x 1,5 - 6	5 x 4	5 x 2,5		

T: Through cable - B: Branch cable



Product	In line	T	B	Ø (mm)	(mm)
Super Klik 2	2 x 4 - 16	2 x 10	2 x 6	30	220 x 85 x 46
	3 x 4 - 16	3 x 10	3 x 6		
	4 x 4 - 16	4 x 10	4 x 6		
	5 x 4 - 16	5 x 10	5 x 6		

T: Through cable - B: Branch cable



Product	In line	T	B	Ø (mm)	(mm)
Super Klik 3	-	2 x 4 - 25	2 x 1,5 - 16	30	220 x 85 x 46
		3 x 4 - 25	3 x 1,5 - 16		
		4 x 4 - 25	4 x 1,5 - 16		

T: Through cable - B: Branch cable

